

CIT Brains (Teen Size League)

Yasuo Hayashibara*, Hideaki Minakata*, Kiyoshi Irie*,
Katsuhiro Ichizawa*, Kousuke Machi*, Kazuhiro Tanimoto*,
Kosuke Nohira*, Issei Tsuchihashi*, Yuka Yamada*, Toshiyuki Akitani*,
Yusuke Ito*, Daiki Maekawa*,
Shigechika Miki**, Yoshitaka Nishizaki ***, Kenji Kanemasu****,
Hajime Sakamoto*****

*Chiba Institute of Technology, 2-17-1 Tsudanuma, Narashino, Chiba, JAPAN

**Miki Seisakusyo Co, Ltd., 1-7-28 Ohno, Nishiyodogawa, Osaka, JAPAN

***Nishizaki Co, Ltd., 1-7-27 Ohno, Nishiyodogawa, Osaka, JAPAN

****Yosinori Industry, Ltd., 1-2-23 Owada, Nishiyodogawa, Osaka, JAPAN

*****Hajime Research Institute, Ltd., 1-7-28 Ohno, Nishiyodogawa, Osaka, JAPAN

yasuo.hayashibara@it-chiba.ac.jp

In this paper, we describe on our system for the RoboCup soccer teen size humanoid league. The system we designed has some features. They are high mobility, well-designed control system, position estimation by one camera and user-friendly interface. The robot can walk speedy and robustly. The maximum speed is approximately 0.4m/s. It also has a feedback system with gyro sensor to prevent falls. The robot has two control boards. One is for walk and another is for image recognition, behavior determination and so on. The latter CPU board is light weight and high performance. Its operation system is NetBSD, so we can use UNIX's useful tools. The robot detects the positions of landmarks by image processing. From the positions, the robot can also estimate own position by using a particle filter. Last feature is user-friendly interface to help strategy development. Our robot has wireless LAN interface to communicate outer PC. The robot sends data including measured positions and status of robot. The PC can store and analyze them to improve the rule of behavior.

1. Introduction

In this paper, we describe on our system for the RoboCup soccer teen size humanoid league. Our robot is well-designed and controlled robustly. Two years ago, our CIT Brains got the first prize of technical challenge and the second prize of 2on2 soccer in RoboCup 2010. Our team members were specialists from some technological areas. We integrate our technologies for developing an intelligent humanoid robot. Hajime Research Institute developed the mechanism and control system of the robot. Chiba Institute of Technology developed computer system and

overall intelligence such as image recognition and soccer algorithm. Remarkable topic is that the most of members are undergraduate students. Through this development, the professors try to make an educational and research platform robot system of intelligent humanoid. Almost all algorithm of behavior decision are programmed by the undergraduate student heuristically.

We develop two size robots for RoboCup. One is for kid size league and another one is for teen size league. Mainly, Hajime develops those robots and he/she use same control board. So, we can control those different size robots with same command system. It enables to decrease the cost to develop the system. We can apply almost same program to them. Furthermore, his robots perform high mobility and stability. The normal speed is approximately 0.4m/s. It can also walk to any direction and angle smoothly. For stable walking, it has gyro sensor. The robot has two CPUs. One is used for walk, and another is used for image recognition, behavior determination and so on. Both CPUs are designed for humanoid. They are light weight and high computational capability. Especially, the latter computer is installed NetBSD operating system. So, we can use UNIX powerful tools. Generally, UNIX system is unsuitable for real-time operation. For assisting real-time computing, the CPU board has a FPGA.

2. Overview of the System

The photograph of our robot is shown in Fig.1. The specification of the robot is indicated in Table 1. The overview of the control system is shown in Fig. 2. Our robot system consists of a camera, computers, sensors, servo motors, batteries and some user interfaces such as switch and LED. The camera sends image signal to the main CPU board. The signal is captured and stored in frame buffer memory. The CPU processes the image data to detect positions of ball, robots and landmarks. From the landmarks' positions, the robot estimates own position by using a particle filter. From these data, the robot selects a next behavior. The behaviors which we can choose are not only just simple moving, but also complex task like following ball. We prepare some behaviors. The action command is sent to sub CPU via RS232C network. The CPU decodes and executes the command. It sometimes returns the status data to the main CPU. If the command is a kind of moving the body or checking a status, the sub CPU sends a command to servo motor via RS485 network. Each servo motor has own CPU to control motor and receive/send commands. Because all servo motors are daisy-chained, the command is sent to all motor. The command includes ID number, so the servo motor can identify the command to which is sent. The servo motor decodes and executes the command. The displacement angle is controlled in local motor unit. The sub CPU should not send commands at short intervals. Totally, this system is constructed as a well-designed hierarchic system. So, we can modify the system easily.

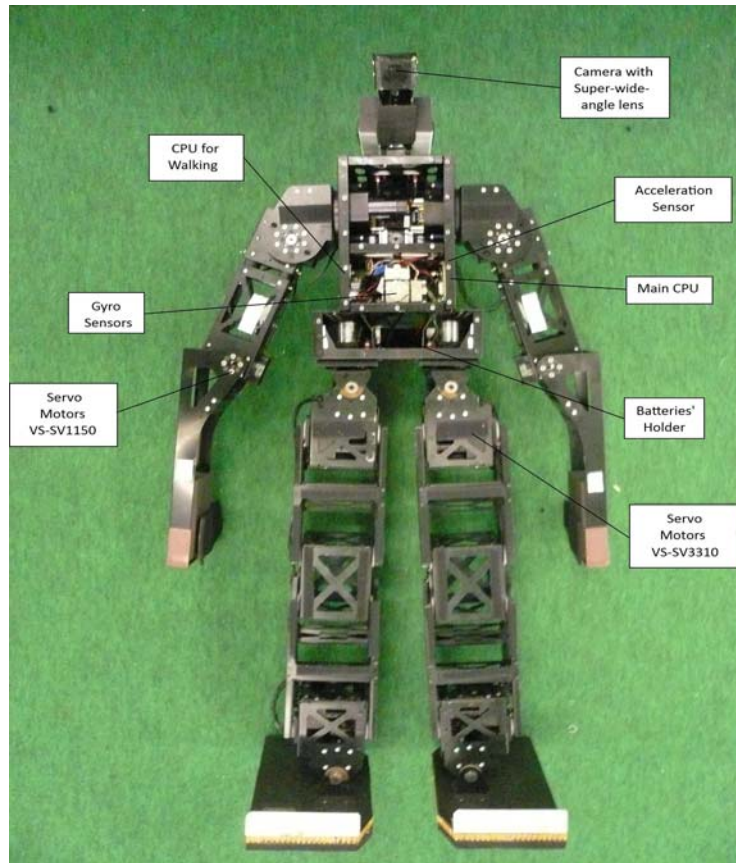


Fig.1 Structure of the Robot

Table 1 Specification of the Robot

Weight	12.0 kg (Including Batteries)
Height	1000 mm
Velocity (Forward)	0.4 m/s (maximum)
Walking Directions	All direction and rotation (Select the angle, stride, period and so on)
CPU Board	Main: Brains Corp. mmEye-PPC (Freescale MPC5200) Sub: Hajime Robot HC5 (Renesas SH-2A/7211)
OS	NetBSD (mmEye-PPC)
Interface	Ether(100Base-TX) x 1, USB x 1(USB-wireless LAN), CF x 1, RS232C x 2, Sound In/Out , Digital I/O, etc
Servo Motor	Vstone VS-SV3300 x 2, VS-SV3310 x 4, Hajime Servo x10, ROBOTIS RX-28 x1
Battery	A123 Systems Li-Fe 19.8V x 1

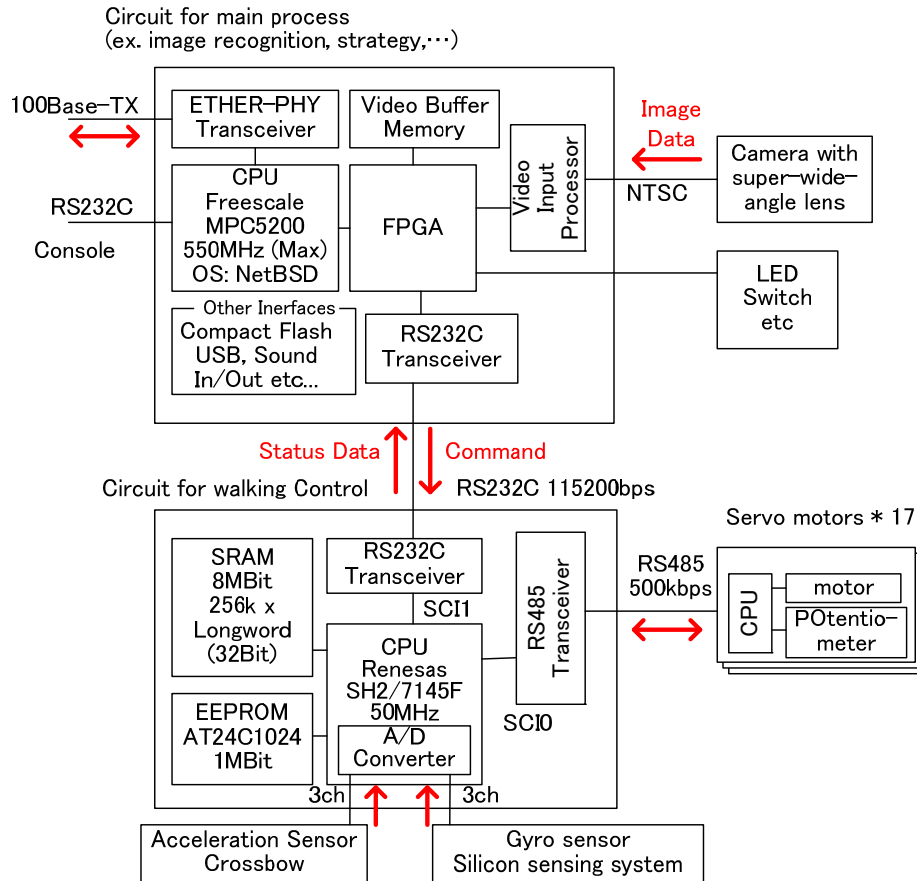


Fig.2 Overview of the Control System

3. Mobility

We developed a new robot. We apply parallel links to the legs. By the mechanism, the stability of walk becomes much better. And, the number of servo motors was also decreased compared by the previous robot. At the neck, an energy-absorbing mechanism is applied. Even if the robot falls, the camera may be not broken.

4. Computer System

One of significant feature of the robot is high computational capability. For using this advantage, the robot processes image data of 30 frames per a second. The CPU is



Fig.4 Estimating Process Using Particle Filter

6. Strategy Development Environment

We develop a user-friendly interface for strategy development environment. The GUI is already displayed in Fig.3. The programmer can check many kind of thing in this interface. This interface is provided as following.

[output]

- 1) simple command to sub CPU (the command can also generate by joystick, mouse and keyboard)
- 2) threshold of color (its effectiveness can be check immediately)
- 3) strategy name like forward and keeper (it select the program in robot)
- 4) fight side and our color

[input]

- 1) image data (It is possible to display the result of image processing)
- 2) detect and estimate positions (It is indicated graphically and saved in storage.)
- 3) command to sub CPU (We can check the algorism)
- 4) message (If the programmer want to know the robot status, he/she can insert the message in the program. It is also saved in storage)
- 5) color values (We use the YUV color value.)

These are example of input/output data. More data is interacted on this interface. Using this interface, the programmer can check the algorism easily. He/She can refer almost all data, so he/she can find the problem smoothly.

7. Conclusion

In this paper we described on our system. Our system has some features. They are high mobility, well-designed control system, position estimation by one camera and user-friendly interface.