

Team Description Paper:HuroEvolutionJR Humanoid Robot for Robocup 2013 Humanoid League

Chung-Hsien Kuo, Yu-Cheng Kuo, Yu-Ping Shen, Lukman Arif Kurniawan, and Fahmizal

Department of Electrical Engineering, National Taiwan University of Science and Technology, 43 Sec. 4, Keelung Rd, 106 Taipei, Taiwan

{chkuo, D10107301, B9807017, M10002812, M10007809}@mail.ntust.edu.tw

Abstract. In this team description paper, our KidSize humanoid robot entitled HuroEvolution^{JR} is introduced for the Robocup 2013 humanoid league. The HuroEvolution^{JR} is constructed as a eighteen degree-of-freedom biped humanoid robot. A CMOS USB camera system is connected to a PICO-820 single board computer to perform autonomous image captures and motion controls. The functions within localization of unknown ball position, walking ability towards the ball, robot positioning at the ball for kicking, kicking the ball towards the goal, and ability of getting up autonomously from a fall are all desired to perform qualifications for Robocup 2013 humanoid league. At the same time, the joint motors use Robotis DYNAMIXEL series Servo motors to reduce motion control complexity. As a consequence, thee humanoid robots are organized in our team to complete competitions for the Robocup 2013 humanoid league.

Keywords: humanoid robot, autonomous robot, soccer robot, image localization

1 Introduction

Small size humanoid robot studies are increasing very fast in the last decade. In recent years, RoboCup [1] is one of the most important competitions within humanoid robot researches. Due to the design limitations of robot size, mechanical structure, and control components, the development of a kid size humanoid robot becomes a challenging task. On the other hand, competition situations are fast transiting, and humanoid robot are required to be justified according to situation changes. Therefore, an artificial intelligence (AI) based decision making module is developed using strategy based rules. These rules are made based on the vision's system of our robot.

On the other hand, the walking patterns are generated in terms of an AVR [2] based gait controller, and UART serial motion commands are further generated to control sixteen Dynamixel RC servo motor's positions [3]. As consequence, the overall hardware components of our HuroEvolution^{JR} humanoid robot is composed of a

single board computer with windows XP operation system, a conventional web camera, an AVR micro controller, battery and power regulations module. The software components consist of the functions of image capture, image recognition, localizations of a ball and a goal, strategies and decisions, gait pattern generations, acceleration data detection, and motor controls.

This project is the third time of our team to participate the RoboCup. However, in last seven years, we participated the Hurocup of FIRA [4] from 2006 to 2012. We awarded the forth place of the overall rating of FIRA HuroCup in 2006 (robot name: Taiwan 101 [5] from the team advisor's former university) and third place in 2010. The current developments of the HuroEvolutionJR are designed based on our previous experiences. In RoboCup 2011, we reached the quarter-final in humanoid kid-size competition. Fig. 1 shows the humanoid robots in a competition of our team and the team Sitik KIT from Japan.



Fig. 1. Our robot on competition field in Robocup 2011.

2 Mechanical Design

The HuroEvolution^{JR} is designed as a sixteen degree-of-freedom (DOF) humanoid robot, where 12 DOF joints are desired for two legs, 4 DOF joints are desired for two arms, and 2 DOF joints are desired for head. The mechanical structure is shown in Fig. 2. A conventional web camera is mounted on the robot head. An accelerometer is attached on the chest of the body so that the falling down situation can be detected. As a consequence, the photo of our HuroEvolution^{JR} is shown in Fig. 3.

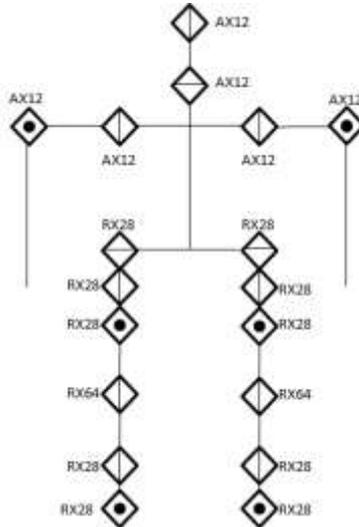


Fig. 2. Skeleton model of the HuroEvolution^{JR}.

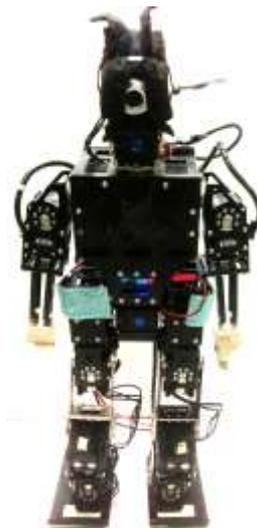


Fig. 3. Photo of the HuroEvolution^{JR}

3 Hardware Design

Five hardware modules are embedded for the HuroEvolution^{JR} humanoid robot, and they are a single board computer, a conventional web camera, an AVR micro controller, accelerometer sensor board, and RC servos. The hardware architecture is shown in Fig. 4, and the hardware specification is shown in Table 1. These modules are further introduced:

- Single board computer: Due to power consumption and size concerns, an Axiomtek PICO-820 single computer board is used. The single computer board uses the Microsoft Windows XP as its operation system. The software modules of image capture, image recognition, falling down detection, and gait decision are all implemented based on this single board computer. On the other hand, an AVR based gait pattern generator is connected with a PICO820 board to generate real-time gait patterns for a specific gait decision.
- Conventional web camera: In this team project, a conventional web camera (Philips SPC-900NC [6]) is desired to capture images in front of the robot.
- AVR microcontroller: The AVR based microcontroller is used to implement real-time gait pattern generations by either a kinematics or training based motion patterns. The input of the gait generator is a “gait decision”, and the outputs are a set of synchronized motor position commands via UART communications.
- Accelerometer sensor board: In this board, an accelerometer with ADXL345 [7] is used for this project to detect the falling down situations. More specially, the sensor data is collected by the AVR microcontroller.
- RC servos: Sixteen RC servos with Robotis Dynamixel model are used to perform the desired gait motions.

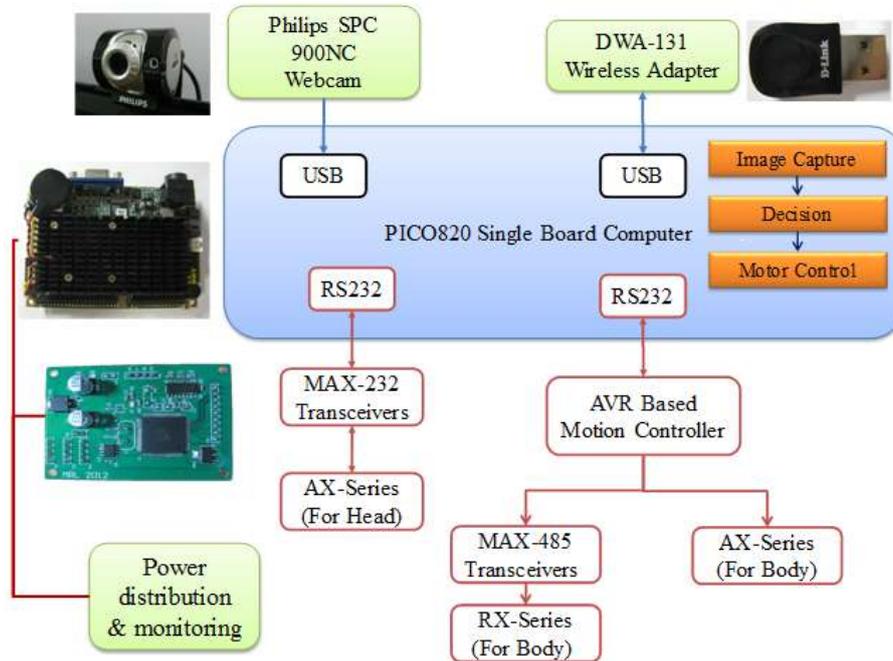


Fig. 4. Hardware architecture

Table 1. Hardware specification

ROBOT Name: HuroEvolution ^{JR}	Height of Robot		490mm
	Arm length		500mm
	Weight of Robot		3.1kg
Walking Speed	Maximum: 10 cm/s		
Type of motor	6xAX-12(Servo motor)	8xRX-28(Servo motor)	2xRX-64(Servo motor)
Torque	12.0kg/cm~ 16.5kg/cm	28.3kg/cm~ 37.7kg/cm	64.4kg/cm~ 77.2kg/cm
Speed	0.196 sec/60°	0.126 sec/60°	0.157 sec/60°
Degree of freedom	18 With Leg: 6 x 2 (RX-28 & RX-64) Arm: 2 x 2 (AX-12) Head: 2 (AX-12)		
Computing unit	PICO820(Single Board Computer) Processor: Intel® ATOM™ processor Z530 Operating System: Windows XP		
Motion Controller	AVR ATmega1280		
Camera	Webcam(Philips SPC900NC) Pixel Clock Frequency: 29.5MHZ Total Picture Element 1024 (H) x 768 (V)		
Batteries	1 x Li-Po 11V 1500mAh , 1 x Li-Po 14.8V 1500mAh		
Accelerometer	ADXL345		

4 Software Design

In addition to the hardware, the software components are also introduced. The software components consist of the modules of image capture, image recognition, localizations of a ball and a goal, strategies and decisions, gait pattern generations, acceleration data detection, and motor controls. These modules are implemented on either the PICO-820 or AVR. They are further described in the follows.

- Image capture and image recognition: This module is responsible of retrieving the pixel regions of the ball and goal. If the ball and goal cannot be recognized, the robot may rotate itself or move forward and try to find it.
- Localizations of a ball and a goal: This module is responsible of retrieving the directions of the ball and goal as well as the approximate distance of the ball and goal.
- Strategies and decisions: To finish a competition, a rule based decision subsystem is developed according to different strategies. In addition, a simple coordinated subsystem is further introduced to define the role of robots.
- Gait pattern generations: Several basic gait patterns such as “moving forward”, “side-shifting”, “rotating itself”, “standing up from a fall”, “backward walking”, and so on are generated via a AVR microcontroller. In the current version, the gait patterns may be generated from kinematics or on-site training modes. The use of mode is determined by different characteristics of the gaits.
- Acceleration data detection: A serial communication packet is decoded to retrieve the acceleration data so that the falling down situation can be detected.

- Motor control: Due to the uses of Robotis Dynamixel RC servos, the motor control is implemented using a sequence of serial communication packet.

5 Conclusion and Future Work

Humanoid robotic research is a very challenging research topic. Our laboratory has devoted 5 years in the development of humanoid robot from small size humanoid robots [5, 8], full size humanoid robot [9], parallel kinematics based humanoid robot [10] and hybrid-structure humanoid robots [11]. We also participate the FIRA competitions for 7 years. We are now trying to extend our research interests to the most important humanoid robot competition, Robocup. We believe the participations of Robocup will induce more research potential for our team via sharing and learning with other teams. The current version is just a prototype to be submitted for the qualification. In the future, a Linux kernel will be used for the future study to improve the real-time performance. On the other hand, fast and stable humanoid locomotion is another issue for use to improve the walking performance. Finally, modular, flexible as well as reusable software and control architectures are also to be justified to increase the efficiency of on-site adjustments on the competition field.

References

1. Robocup Humanoid League Competition, [Online] Available, <http://www.robocup.org/>
2. AVR Product Information, [Online] Available, <http://www.atmel.com/products/AVR/>
3. Robotis Product Information, [Online] Available, <http://www.robotis.com/>
4. FIRA HuroCup Competition, [Online] Available: <http://www.fira.net/>
5. C.H. Kuo, Y.C. Hung, E.C. Lin, J.C. Chen, Mike Lee, C.C. Sun, 2007, "Autonomous Humanoid Soccer Robot: Taiwan 101 V1," *2007 FIRA Robot World Congress*, SF, U.S.A., Paper ID: 07-119, 2007.
6. Philips SPC-900NC Product Information, [Online] Available: <http://www.p4c.philips.com/cgi-in/dcbint/cpindex.pl?ctn=SPC900NC/00&scy=gb&slg=en>
7. ADXL345 Product Information, [Online] Available: <http://www.analog.com>
8. C.H. Kuo, C.Y. Chen, "Development of Vision Guided Small Size Humanoid Soccer Robot Using Chip Based Controllers," *International Automatic Control Conference*, Taichung, Taiwan, pp. 854-859, 2007.
9. Chung-Hsien Kuo, Che-Chien Chen, Jia-Wun Siao, Chun-Tzu Chen, "Development of Modular-Based Large Size Humanoid Robots," *Journal of Harbin Institute of Technology*, Vol. 15, No. 2, pp. 190-194, 2008.
10. Chung-Hsien Kuo, Chun-Tzu Chen and Yaw-Chun Hung, "Design and Implementation of a Parallel Kinematics Mechanism Based Humanoid Robot," *International Automatic Control Conference*, Tainan, Taiwan, Paper ID: I-1903, 2008.
11. C.H. Kuo, C.C. Chen, W.C. Wang, Y.C. Hung, E.C. Lin, K.M. Lee, Y.M. Lin, "Remote Control Based Hybrid-Structure Robot Design for Home Security Applications," *2006 IEEE/RSJ International Conference on Intelligent Robots and Systems*, Beijing, China, pp. 4484-4489, 2006.