

# VATIO UP

## Team Description Paper for Humanoid KidSize League of RoboCup 2015

### Hefei, China

Roberto Carlos Ramírez, Efraín Hernández, Jonathan Alcántar, Manuel Honorio de la Torre, Andrea Santillana, Arturo Montufar, Antonio Salvador Gómez  
Robotics Lab, Universidad Panamericana Campus Guadalajara, Jalisco, Mexico  
{robramir, ehernandezf, jonathan.alcantar, andrea.santillanaf, arturo.montufar}@up.edu.mx,  
{manuelmhtr, pixki.16}@gmail.com  
Web: <http://www.robotica-up.org>

**Abstract.** This document describes the hardware and software of the Humanoid Robots Team VATIO UP, designed and manufactured by students, able to play soccer autonomously to participate in Robocup kid size humanoid league. This is the sixth generation of robots developed and designed by the team Pioneros Mexico, and this was the first Mexican team entry in humanoid league of Robocup in 2006.

## 1 Introduction

Robotics is rapidly becoming one of the leading fields of science and technology: Many experts forecast that in the XXI century humanity will coexist with the first alien intelligence we have ever come into contact with robots. This is certainly due to new needs and expectations humans have from robots. It seems that requirements for factory automation, assembly, and industrial process control have been reasonably fulfilled. However, new fields such as service and assistive robotics require different kinds of robots that humans can interact with. The actual challenge of robotic is to equal the mobility of the human beings, making movements of great complexity and precision, and to be more intelligent.

With this project the team intent to contribute in robotic science for applications that improve people quality life, for example the development of prosthesis with the objective and possibility that an invalid person could walk again and recover great part of mobility. With this background context, we have encouraged the construction of our own research platform for studying robot locomotion and sensing, thus, our VATIO-UP Humanoid Robots are capable of bipedal walking and performing human-like motions (Fig.1).

**Notice of commitment:** *The team VATIO UP commits to participate in RoboCup 2015 in Hefei, China and to provide a referee knowledgeable of the rules of the Humanoid League to serve during the competition.*

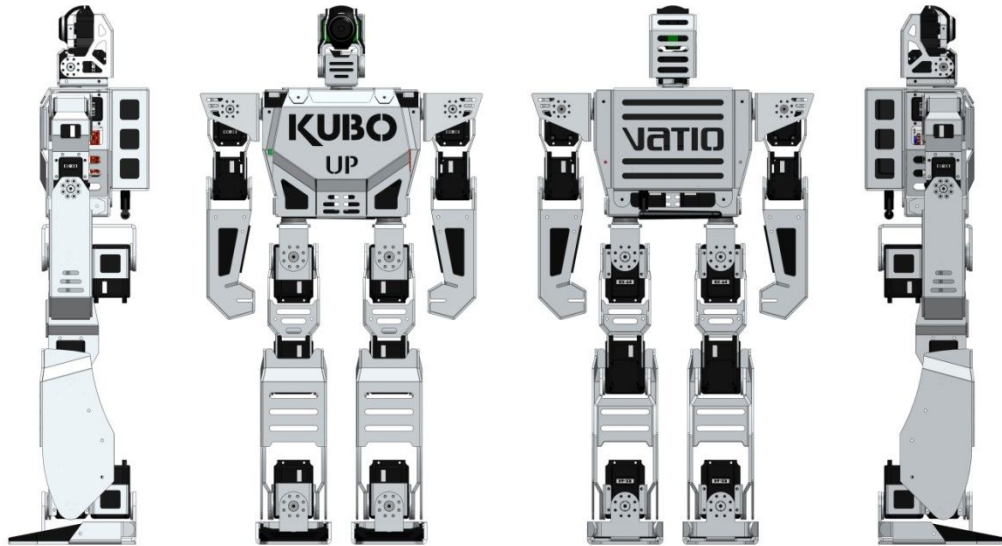



Fig. 1. VATIO-UP Humanoid Robot

## 2 General Architecture

VATIO-UP Humanoid Robots are a self-contained prototype with a head, a torso, two arms, and two legs. It exhibits 20 DOF powered by a total of 20 actuators. The head consists of a pan-and-tilt structure (2 DOF). Arms add 6 DOF, 3 DOF each: shoulder, arm, and elbow. Head and arms are mounted on a torso. Finally, the legs add 12 DOF, 6 DOF each: one at waist level that allows rotation of the entire leg, two at the upper part, one at the knee, and two at the foot. An open source embedded color video camera is mounted on the head's pan-and-tilt structure.

Both batteries and processing unit are to be on-board the structure. Fig. 2(a) shows VATIO-UP Humanoid Robots connection block diagram, while its physical structural design is shown in Fig. 2(b). The main structure involves four types of blocks connected each other by electrical and data lines. These blocks represent components, sensors, and the upper and lower servomotors, which form together the mechanical structure of the robot. On the upper side, there are eight servomotors RX-28 (blue), three for each arm (3 DOF) and two for the head (2 DOF), while in the lower side there are 12 servo motors RX-64 (green): six for each leg (6 DOF). Since the servomotors on the lower side require a higher torque (because of the weight they have to move), a higher voltage needs to be supplied (green line), while on the upperside, the torque is minimum and a lower voltage (blue line) can be supplied.

Two types of sensors (orange) are used to have feedback from the outer world: a camera placed on the head and a digital compass located inside the chest. This last one includes magnetic sensors and accelerometers that send information to the processing unit to keep the robot's balance and let him know if it is lied down either up face or down face.

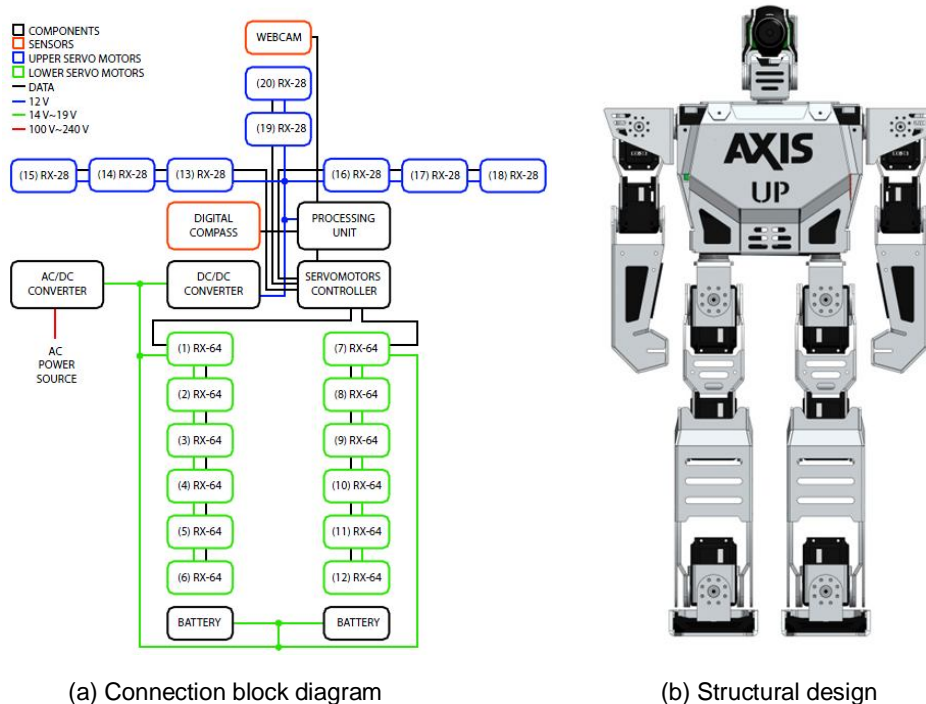

**Fig. 2.** General architecture of VATIO-UP Humanoid Robots


Likewise, instructions for the servomotors are sent through the servomotor controller by the processing unit. Data are sent by serial connection (black line) through five data lines (one for each limb and head), even if some at the middle of the chain are not required to move. The main power source of the robot is taken either from the batteries or by plugging it directly to the AC power source (red line).

### 3 Hardware

Humanoid Robots are entirely made from two types of aluminum alloys: 3105-H22 and 3003-H23. The first one is malleable and is used for the most complex links containing folds. The second one is rigid and is used for the simpler links. H22 aluminum links were laser cut with a  $\pm 2$  micron precision, folded with hydraulic press, and welded using gas tungsten arc welding. H23 aluminum links were manufactured with a three-axis CNC machine. Actuators powering the robot's joints are servomotors of type RX-28 and RX-64 from Dynamixel [1]. All three provide a step precision of  $0.29^\circ$  while torque is 28 and 64 kgf-cm respectively. RX-28 servomotors are used for the head and for the upper limbs, and RX-64 for the waist and lower limbs. The processing unit running Linux Debian 7.4, and algorithms in C++, is used for the intelligence and motion decisions, and to communicate to the servomotors controller to send the instructions for each servomotor. This unit module is located inside the robot's torso. A set of batteries are located at the arms. Robot's main physical specifications are listed in Table 1 and shown in Fig.3.

**Table 1.** Physical specifications of VATIO-UP Humanoid Robots

Height	56 cm
Width (arms closed)	33 cm
Width (arms opened)	72 cm
Depth	16 cm
Arms' length	24 cm
Legs' length	32 cm
Total mass	5 kg

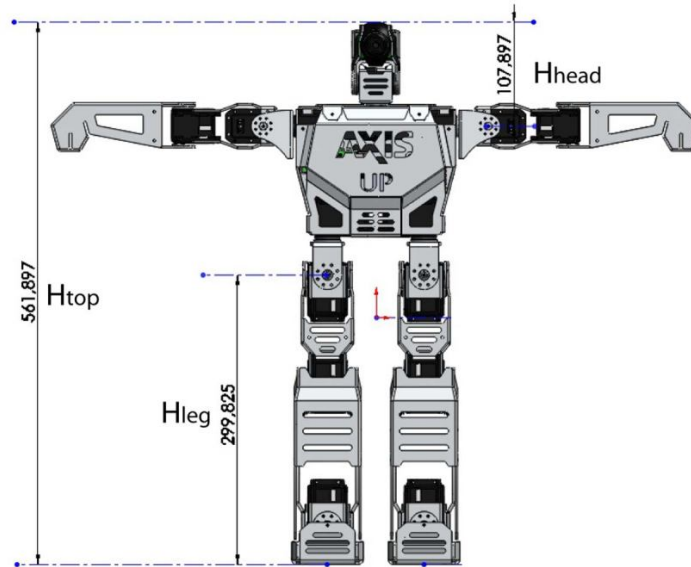

**Fig. 3.** Physical dimensions of VATIO-UP Humanoid Robots

## 4 Software

The whole software algorithms for the robot is implemented in C++, using event handler and multi-threading tools, that helps because it has several systems running simultaneously, and each one have different importance level and hardware requirements; in addition, depending of the situation only some systems are need to be activated, e.g. during a game it needs different systems that during motion modeling, demonstration or calibration.

The robots have separated functions in several systems: locomotion, video processing, reading sensors, controlling actuators, wireless communication, kinematic modeling, graphical interface and behavior control. In addition, each system has mechanisms to identify errors in themselves, for example, identify if a sensor or actuator is not working properly, generate alerts, and try to solve the problem.

## 5 Electronics

Each robot is now equipped with BeagleBone Black single board computer [2] as the processing unit, that has is a full featured PC single board computer, tiny and power saving. This CPU have an AM335x 1GHz ARM® Cortex-A8, 512MB DDR3 RAM, 4GB 8-bit eMMC on-board flash storage, and using Linux Debian 7.4 as OS. That board has several interesting features which make it ideal as a brain for humanoid robots. These include low weight and power consumption, direct connection by 2x 46 pin headers for GPIO's ports for all de sensors, camera and controllers. The board also has a USB 2.0 port connected to a USB host for Wi-Fi adapter and other devices.

The UM6 Ultra-Miniature Orientation Sensor [3] combines sensor measurements from rate gyros, accelerometers, and magnetic sensors to measure orientation at 1000 Hz. Angle estimates are available as Euler Angle or Quaternion outputs, and it has direct connection to the processing unit (BeagleBone Black) by I2C in a GPIO. The orientation sensor is very useful to determinate the position of the robots inside the field but is used in parallel with the vision system to have redundant information.

The Dynamixel servomotors controller is a custom made embedded system with a microcontroller ATXMEGA128 [4] and other components for communication with sensors and the processing unit. This controller is directly connected to the 2x 46 pin headers for GPIO's ports in the BeagleBone Black board and additionally manages regulated power to all different robot's systems.

A CMUcam5 [5] is mounted in the head with a pan-and-tilt structure to acquire image data from the outer world. Each robot has a package of batteries that provide power to have 20 minutes of autonomy at full charge. The robot has two packages of rechargeable LiPo batteries [6] of 18.5 volts at 25C 750mAh, one in each arm.

## 6 Robot Behavior Control

The behavior control is based on the concept of Finite State Machine, and implemented in C++, where has been used several state unknowns. Basically there are three layers: Operation Mode, Define Target and Individual System Control, but each layer may have sublayers like a hierarchy tree; for example, at layer Individual System Control there is the Locomotion sublayer, at layer Locomotion there is the Walk Forward sublayer, and at layer Walk Forward we have the DS-ZMP state (Double Support - Zero Moment Point). This kind of implementation makes very easy to add, remove or even improve states at any level of the hierarchy tree.

For a good performance in the game a good Behavior Control but also a great Locomotion System are needed; to achieve this the simplified differential equations system was solved analytically (assuming constant inertial tensors) obtained from the 3D dynamic free diagram body of the humanoid, that generate a very good approximation to the ideal trajectory of the COM (Center of Mass). After that, inverse kinematics was apply to find joint angles for the legs but it changes the COM in the model, so the gradient descent algorithm was used to approach again to the ideal trajectory. Finally, the robot uses the arms to reduce to the minimal the moment generated by the variability of the inertial tensors.

In addition, the analytically solution was solved to use easily the whole algorithm, that means, it only pass some tangible parameters of the motion desired to design and it is done. Those parameters are for example the length of the step, initial altitude of the COM, distance and angle between feet, inclination angle of the back, desired velocity, step frequency, among others. The first limitation of this method is that the complete system needs an excellent dynamic model of the robot, but KUBO, AXIS and ROOT have it because each element of the robots was modeled in a CAD software.

## 7 Vision

The Vision System is implemented using basic open source algorithms from **CMUcam5** and adapted to work in synchrony with our own intelligence and control algorithms. Goalkeeper and other player have different algorithms because their main role play; for example, If the robot is playing as a goalkeeper, the vision system needs to process almost all the time only the ball algorithm to achieve the best performance possible. Vision performance had been optimized for different identification algorithm using different techniques; for example, to identify the orange ball it only use color identification, but to identify a pole it uses morphological identification and color identification (to know which pole it is).

## 8 Prior Performances in RoboCup Competitions

The team VATIO-UP (before Pioneros Mexico, and Mexatronics UP) had participate in RoboCup Humanoid League since 2006 in Bremen, and Robocup editions 2007 in Atlanta, 2009 in Graz, 2010 in Singapore, 2011 in Istanbul, 2012 in Mexico City and 2013 in Eindhoven. Also this team participates in Robocup local editions as Robocup Mexican Open in 2008, 2009, 2011 and 2012 events in Mexico, in 2012 and 2013 at the Robocup Iran Open. All those local and international competitions the team has gained experience and knowledge that have been applied to improve the performance of the robots every year.

For Robocup 2014 team VATIO-UP was qualified to participate in humanoid Kid size but was for economic reasons, but mainly for being preparing a new humanoid platform for Adult size humanoid robot. That platform has been in development since 2014 and will be presented in Robocup by 2016.

## 9 Conclusion

Robots KUBO, AXIS and now ROOT are the sixth generation of robots designed and developed originally by the team Pioneros Mexico. This work was inspired in amazing robots developed in other countries and our intent is to reach that level applying this knowledge to give some social problems a better solution.

## 10 Publications

- Hernández (E.) and Velázquez (R.), Design and Development of Humanoid Robot ZERO, 9th IEEE Latin-American Robotics Symposium, Bogota, Colombia, 2011.
- Hernández (E.) y Velázquez (R.), Robot Humanoide ZERO: Diseño, Análisis y Prototipo, SENIE 2011 (Semana Nacional de Ingeniería Electrónica), Tapachula, Chiapas, México, 2011.
- Hernández (E.) y Velázquez (R.), Un Algoritmo de Visión Identificador de Pelotas para Cualquier Tipo de Iluminación Exterior: Aplicación en la RoboCup, 2 Encuentro de Telecomunicaciones y Análisis de Señales, San Luis Potosí, SLP, México, 2010.

## References

1. Dynamixel Robotis. Updated information available at:  
<http://www.robotis.com/xen/dynamixel>
2. BeagleBone Black.  
<http://beagleboard.org/BLACK>
3. UM6 Orientation Sensor. Updated information available at:  
<http://www.pololu.com/catalog/product/1255>
4. Servomotors embedded controller  
<http://www.atmel.com/devices/ATXMEGA128A1U.aspx>
5. CMUcam5. Updated information available at:  
<http://www.cmucam.org/projects/cmucam5/wiki>
6. Thunder Power ProLite LiPo Batteries. Updated information available at:  
<http://www.rcplanet.com>